

DRIVERA W

ISO VG 460

Product Description

High performance industrial gear oils that formulated with high quality mineral oil compounded with synthetic fatty oil, which is lubricity additive to reduce friction at metal surface. DRIVERA W provides excellent wear protection and enhance lubrication efficiency to gear teeth.


Benefits

- Excellent lubricity for wear protection and moderate load carrying capability.
- Good wear and corrosion protections which result in extending service life of machines.
- Good oxidative and thermal stability which extend oil drain interval.

Applications

- Designed for industrial worm gear systems which is required lubricity additives to enhance performance of wear protection.
- Applicable for gas compressor which is required tackiness property

KVT Diagram
DRIVERA W

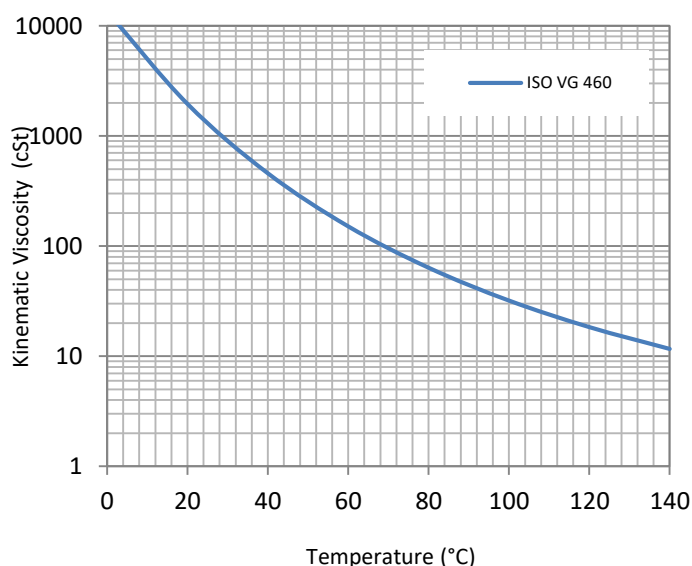

The Moving Innovation 

DRIVERA W

ISO VG 460

Typical Characteristics

Tests	Methods	Units	Results
			460
Kinematic Viscosity at 40 °C	ASTM D 445	mm ² /s	458.8
Kinematic Viscosity at 100 °C	ASTM D 445	mm ² /s	32
Viscosity Index	ASTM D 2270		101
Density at 15 °C	ASTM D 4052	g/cm ³	0.901
Flash Point (COC)	ASTM D 92	°C	245
Pour Point	ASTM D 5950	°C	-9
Foaming	Seq. I	ASTM D 892	5/0
	Seq. II	ASTM D 892	5/0
	Seq. III	ASTM D 892	Nil/0

Performance Standards

- AGMA 9005-E02 Type CP

Health and Safety

This product shows no significant health or safety hazard when used under the recommended applications and suitable handling.

Avoid the direct contact. Wash immediately after contact. Health and safety information is available on the Safety Data Sheet (SDS) which can be obtained from <http://pttlubricants.pttor.com>

PTT LUBE SOLUTIONS Professional Lubricant Service Partner



The product can cause some skin irritation and has flash point higher than 93.4°C

Note: Data and information contained in this publication are based on standard test under laboratory conditions and/or performance test. To consider the use of PTT Lubricants' products in particular application, customer is responsible for determining whether product and information are appropriate for customer conditions or should consult with PTT Lubricants' technical service division. The procedure of using any lubricant may differ or change depended on different machines and their manuals. Therefore, we recommend to read, understand and review the latest SDS in order to ensure the use of product is accomplished safety.

The Moving Innovation 